



DKVM-410H

4-PORT KVM SWITCH WITH HDMI AND USB PORTS

QUICK INSTALLATION GUIDE



Product photo for illustration only. Actual appearance may vary by hardware version and regional release.

For support, visit dlink-mea.com

Package Contents

4-PORT KVM SWITCH WITH HDMI AND USB PORTS
DKVM-410H

1.5 M LENGTH KVM CABLE WITH HDMI AND USB (x2)
CONNECT THE DKVM-410H TO YOUR COMPUTERS

DESKTOP CONTROLLER

QUICK INSTALLATION GUIDE

If any of these items are missing from your packaging, please contact your reseller.

Installing the DKVM-410H


The DKVM-410H supports hot-plugging. You don't need to turn your computers off before installing the device.

- A. Attach your USB keyboard connector to the console USB Type-A port of the DKVM-410H.
- B. Attach your USB mouse connector to the console USB Type-A port of the DKVM-410H.
- C. Attach your monitor's HDMI connector to the console HDMI port (HDMI OUT) of the DKVM-410H.

The following steps below apply to each computer that you are using with your DKVM-410H.

- D. Attach the KVM cable (HDMI connector) to the HDMI port of the DKVM-410H.
- E. Attach the KVM cable (USB Type-B connector) to the USB Type-B port of the DKVM-410H.
- F. Attach the KVM cable (HDMI connector) to the HDMI port located on the back of your computer case.
- G. Attach the KVM cable (USB Type-A connector) to the USB Type-A port located on the back of your computer case.

Installation of the DKVM-410H is now complete.

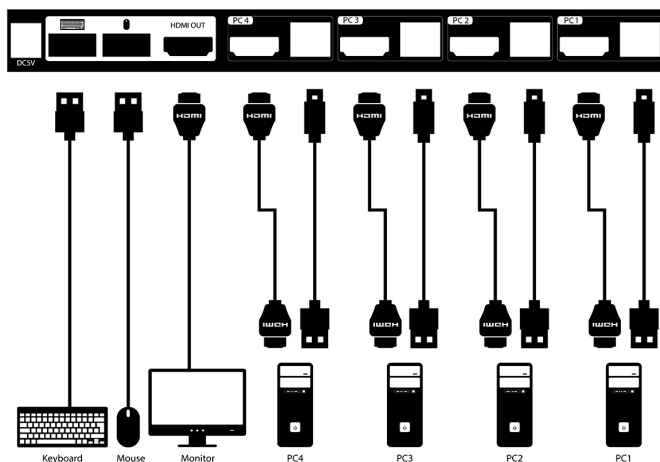

Switching with the DKVM-410H

The DKVM-410H features the buttons located on the front panel to switch quickly and easily between your computers. You can also use the included desktop controller to switch between your computers.

Note: Don't switch PC without finishing PC boot-up.

Hot Keys

You can also use keyboard **Hot Keys** to switch between your computers. Press the **Home / Caps Lock / Scroll Lock / Num Lock** key twice within 2 seconds to enter Hot Key switching mode. A beep confirms that the Hot Key mode is activated. By default, the Home key is used to enter the Hot Key mode. Alternatively, you can use the Caps Lock, Scroll Lock or Num Lock keys.

Press Home + Home ...	Enter Hot Key mode by default
...then press Caps Lock	Enter Caps Lock Hot Key mode
...then press Scroll Lock	Enter Scroll Lock Hot Key mode
...then press Num Lock	Enter Num Lock Hot Key mode
...then press 1 / 2 / 3 / 4	Switch to PC1 / PC2 / PC3 / PC4
...then press → or ↓	Switch to next PC
...then press ← or ↑	Switch to previous PC
...then press B	Toggle the audible beep confirmations on and off
...then press S	Start autoscan mode, which will switch to the next PC automatically after scan interval expires
...then press I + Number + Enter	Set the scan time
...then press G + 1 / 2 / 3 / 4 / 5 / 6	Adjust the HDMI video gain

Troubleshooting

1. WHEN TURNING THE COMPUTER ON, THE KEYBOARD IS NOT DETECTED, OR A KEYBOARD / MOUSE ERROR MESSAGE IS DISPLAYED.

If the computer's BIOS does not support USB boot-up, the system may be unable to detect the mouse and keyboard during startup. Please ensure that your PC BIOS supports USB boot-up, and upgrade your PC's firmware if necessary.

2. THE COMPUTER'S BIOS IS CORRECTLY CONFIGURED BUT THE COMPUTER IS STILL UNABLE TO DETECT THE MOUSE AND KEYBOARD.

Be sure to directly connect the USB KVM switch to USB port on the PC's motherboard rather than through a port on a PCI card, Card Bus, or USB Hub.

3. THE IMAGE ON MY MONITOR IS NOT CLEAR.

Check the following:

- Verify that all video monitor cables are inserted properly.
- Try lowering the resolution and refresh rate of your monitor.
- Try using a shorter video cable.
- Try rescanning for HDMI signal from monitor again.