D-Link®

PRODUCT HIGHLIGHTS

High-Speed Networking

Up to five Gigabit Ethernet ports can be used to connect high-speed devices, allowing fast file transfers and maximizing network bandwidth

Quality of Service

Layer 2 Quality of Service (QoS) provides traffic prioritization on the local network, ensuring smooth VoIP calls and responsive applications

Environmentally Friendly

IEEE 802.3az Energy-Efficient Ethernet (EEE) reduces power consumption when ports are not in use, conserving energy and lowering costs



DGS-F105

5 Port Gigabit Desktop Switch

Features

Fast Connectivity

- Five Gigabit LAN ports for high-speed wired connections
- Plug-and-play installation for convenience

Multicast Features

- L2 multicast functions including IGMP snooping optimize multicast data streams for bandwidth intense applications like IPTV.

Green Ethernet Features

- Reduces power on a port when no link is detected
- Adjusts power on a port by detecting the length of the connected cable

Eco-Friendly Design

- Energy Star compliant
- RoHS compliant

The DGS-F105 5-Port 10/100/1000 Mbps Unmanaged Switches are ideally suited for Small Office Home Office (SOHO), Small Medium Business (SMB), and Small Medium Enterprise (SME) environments. With a durable design, silent operation, and plug-and-play functionality, the DGS-F105 switch can be easily set up and be placed in almost any location where network connectivity is required. Support for IEEE 802.3az Energy-Efficient Ethernet (EEE), Layer 2 Quality of Service (QoS), and Gigabit Ethernet connection speeds provide advanced features in a compact package.

Integrated Networking

The DGS-F105 switch use auto-sensing 10/100/1000 Mbps ports, allowing a small workgroup to flexibly connect Ethernet, Fast Ethernet, and Gigabit devices to create an integrated network. These ports detect the network speed and auto-negotiate between 10BASE-T and 100BASE-TX at full and half-duplex, and 1000BASE-TX at full duplex, allowing you to get the maximum speed possible for each device connected to your network.

Simplified Installation

All of the ports on the DGS-F105 switch support automatic MDI/MDIX crossover, eliminating the need for crossover cables or uplink ports. Each port can be plugged in directly to a server, hub, router, or switch using regular straight-through twisted-pair Ethernet cables. In addition, the DGS-F105 switch feature multiple front, easy-to-access Ethernet ports with two color LED indicators per port to easily distinguish link status.


Green Technology

The DGS-F105 switch feature green technology, such as IEEE 802.3az Energy-Efficient Ethernet (EEE), link status detection, and cable length detection. Energy-Efficient Ethernet reduces power consumption of the switch when network utilization is low, reducing the cost of ownership during periods of inactivity. Link status detection automatically powers down ports when there is no link detected, saving power when the connected device has been shut down or disconnected. Cable length detection automatically adjusts the power output of the port based on the length of the cable, reducing the power requirements of the switch to only what is necessary for the installation.

Traffic Management

The DGS-F105 switch include traffic management features, such as IEEE 802.1p Quality of Service (QoS) and IEEE 802.3x Flow Control. The 802.1p QoS feature allows traffic to be classified in 8 priority levels, allowing different types of traffic to be prioritized, depending on their importance. Flow Control signals to clients when the switch's input buffer is full, helping to minimize dropped packets and providing a more reliable connection for all of your connected devices.

Example Network Topology

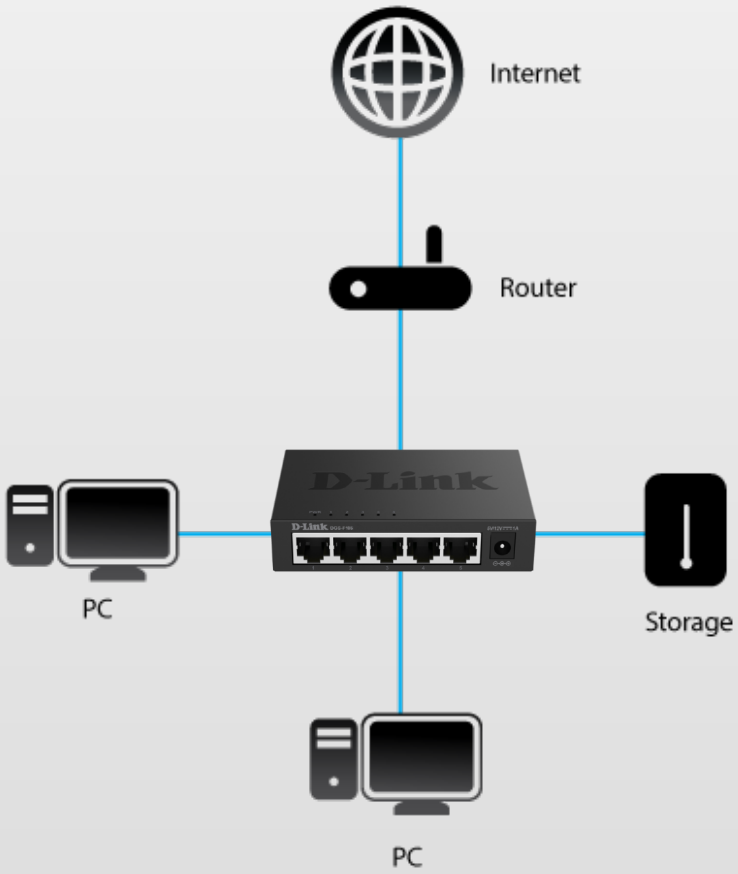

DGS-F105 5 Port Gigabit Desktop Switch

General	DGS-F105
Device Interfaces	• 5 x 10/100/1000 Mbps RJ45 port
Transmission Rate	• 10/100/1000 Mbps Each port supports MDI / MDIX auto-flip and auto-negotiation • Network interface: 10BASE-T or 100BASE-TX, 1000BASE-T Ethernet RJ-45 port
Protocols and Standards	• IEEE 802.3 10BASE-T • IEEE 802.3u 100BASE-TX • IEEE 802.3ab 1000 BASE-T • IEEE 802.3x Flow Control • IEEE 802.1p QoS • IEEE 802.3az Energy-Efficient Ethernet (EEE)
Media Interface Exchange	• Auto MDI/MDIX adjustment for all ports
Performance	
Switching Capacity	• 10 Gbps
Transmission Method	• Store-and-forward
Packet Filtering/ Forwarding Rates	• Ethernet: 14,880 pps per port • Fast Ethernet: 148,800 pps per port • Gigabit Ethernet: 1,488,000 pps per port
MAC Address Table	• 2K Entries
MAC Address Learning	• Self-learning, auto-aging
LED	
Power (per unit)	✓
Link/Activity (per port)	✓ Bi-color LED for 100M/ 1000M
Physical	
Dimensions	• 100 x 65 x 22.5 mm
Power	•12V 1A
Power Consumption	• Maximum: 5 watts
Temperature	• Operating: 0 to 40 °C (32 to 104 °F) • Storage: -10 to 70 °C (14 to 158 °F)
Humidity	• Operating: 10% to 90% non-condensing • Storage: 5% to 95% non-condensing
Lightning Protection Grade	• Common mode: ±4KV, Differential mode: ±1KV
Electrostatic Standard	• Contact: ±6KV, Air: ±8KV
MTBF	• 785,576 hours
Maximum Heat Dissipation	• 10.64 BTU/h
Certifications	
Certifications	• CE
Ordering Information	
DGS-F105	5-Port Gigabit Metal Unmanaged Switch

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners. ©2026 D-Link Corporation. All rights reserved. E&OE.